CJ Series Special Mini Pilot Solenoid Valve



Product Feature

- High flow rate, with a standard rated flow of up to 70 L/min.
- Fast response time, reaching up to 7ms.
- Compact size and low power consumption, with a power rating of only 2.5W.
- Stable and reliable performance, vibration-resistant, and long service life.

Product Application

Textile machinery, pilot parts of various pneumatic valves.

Specifications

Working medium	Clean air (40μm filteration)
Acting type	3/2 N.C. 3/2 N.O.
Actuation method	Electrically operated
Working pressure	0 to 0.7MPa
Working temperature	-20 to 80°C
Orifice size	1.5mm
Valve width	15mm
Protective class	IP65
Response time	Open 7ms, Close 3ms
Working voltage	DC24V
Power	2.5W

ISO9001 CE

CJ Series Special Mini Pilot Solenoid Valve

Main Dimensions

CJ-15-NC DC24V

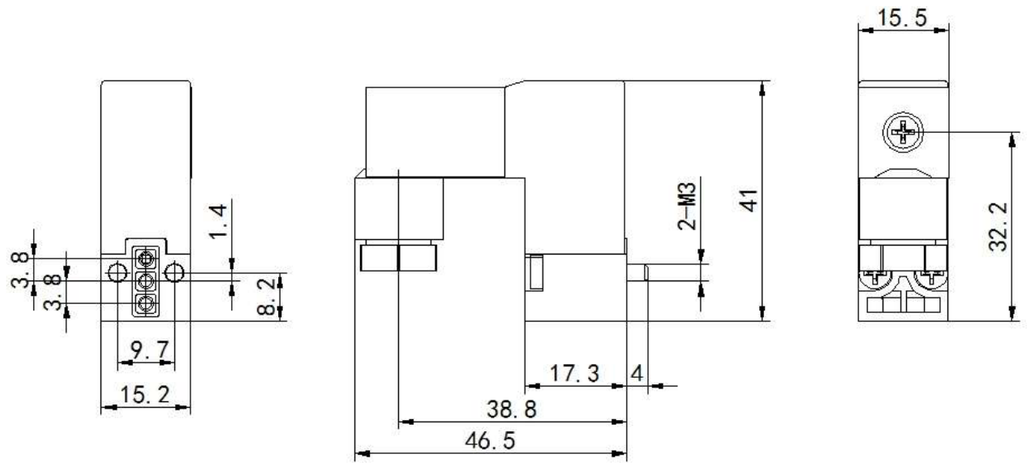

CJ-15-NO DC24V

